

# iCode ECO®

## Datasheet



The following rights are reserved:

- Any unannounced changes to the functionality or appearance of this product will void the warranty.
- Use of this product in any environment or in any manner not specified herein will also void the warranty.

# iCode ECO®

ZE

The iCode ECO® is a very robust lock that makes it practically impossible to break due to its construction. Works via PIN code. It has hidden entrance for mechanical key. This model is compatible with our iTEC on Access applications, which allows Bluetooth opening and remote management.




## technical sheet

Material	Metal Alloy
Opening Method	Code, Card, WiFi, Bluetooth, APP, Mechanical Key
Identification Time	<1.0S
Communication	Bluetooth 4.1, Mifare [13,56MHz]
Cylinder	N/A
Compatibility with Locks	Silent lock iTSL 01
Emergency Power	Micro USB
Emergency Opening	Mechanical Key
Voltage	DC 6v [AAA*4]
Max. Power	6V-MAX
Battery Life	~ 12 months, supports ~ 5,000 opening & closing operations
Leds	White and blue
Low Battery Alarm	In APP and voice alarm <200mA
Consumption	65µA
Static Consumption	5s; 10s; 15s; 30s; 60s; custom
Time Open	~5,000 Openings (1Year)
Number of Openings	iTEC Hybrid, iTEC onAccess
Software	[Web], iTEC onAccessPro [Web], iTEC onHospitality [Web]
APP's	iTEC onAccess
Compatibility	iOS 8/Android 5 or above
Stand Alone	Yes
IP	IP55
Weight	2,10 Kg
Humidity Resistance	30%-95%
Temp. of Operation	-20°C~+ 55°C
N° of Cards	200
N° of Codes	Unlimited
N° of Autodefined Codes	150
N° of Fingerprints	N/A
User Levels	Yes
Management Code	Yes
Door Thickness	35mm ~55mm

## mortises

iTSL 01®

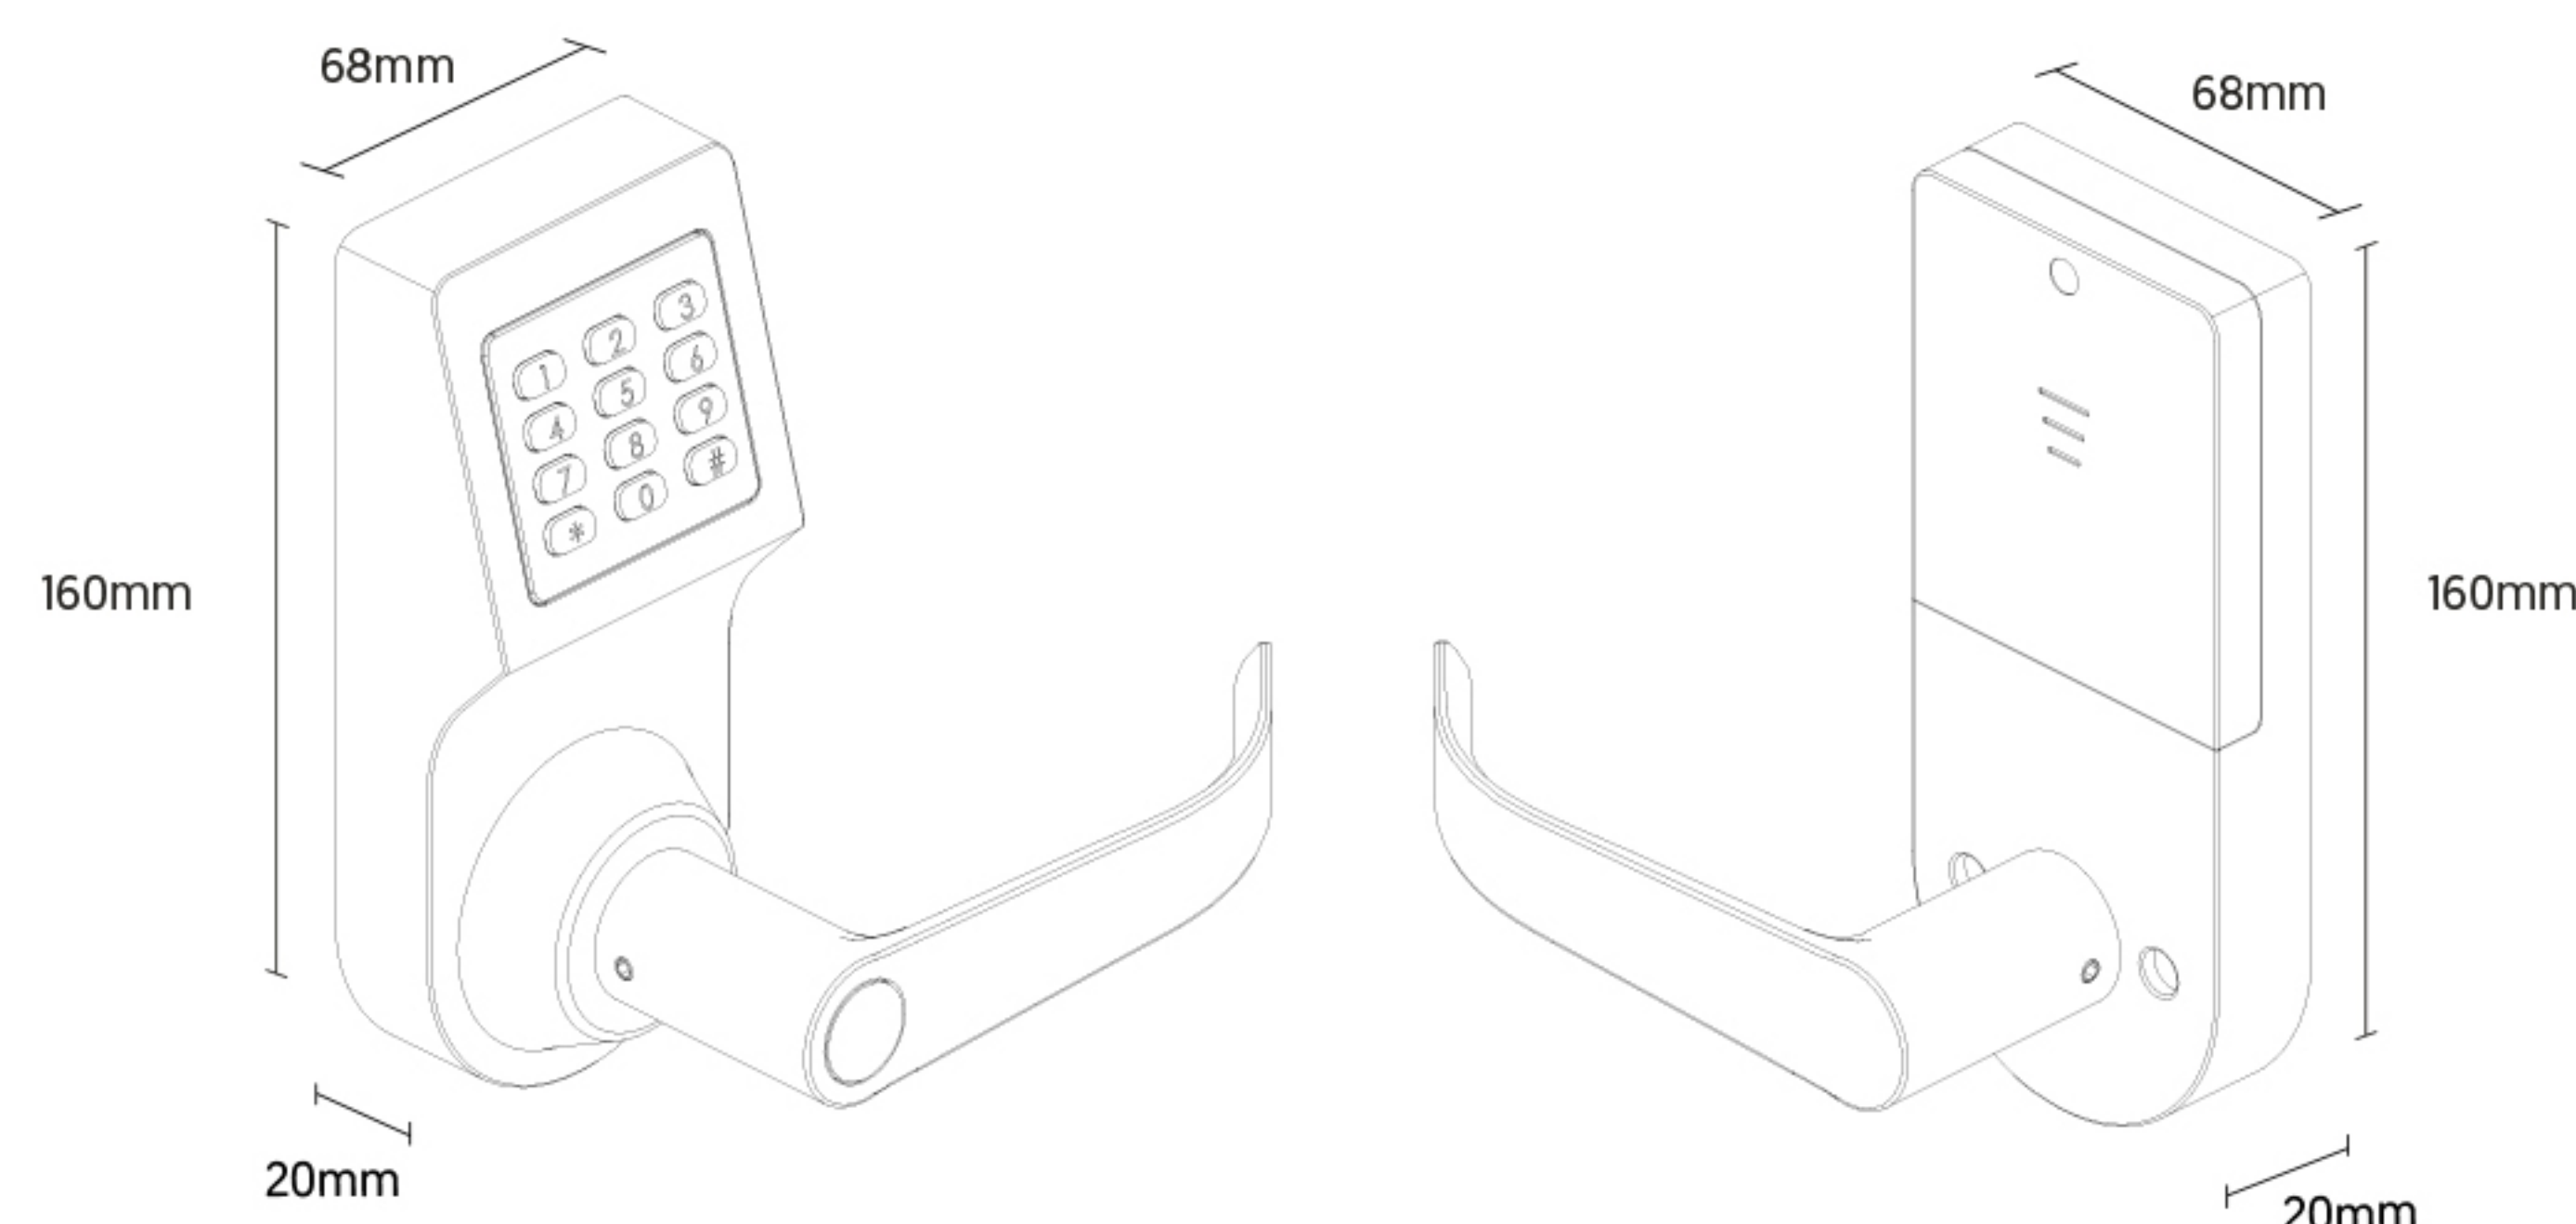



**Web:** [GlobalVisionsInc.com](http://GlobalVisionsInc.com)  
**Email:** [sales@GlobalVisionsInc.com](mailto:sales@GlobalVisionsInc.com)  
**Phone:** 877-725-8869