

iFP 03[®]

Datasheet



The following rights are reserved:

- Any unannounced changes to the functionality or appearance of this product will void the warranty.
- Use of this product in any environment or in any manner not specified herein will also void the warranty.

iFP 03®

 Z
E

iFP 03® provides an opening of the mortise by fingerprint, code combination or Mifare Card, being personal and not transferable increases your safety. iFP 02® is compatible with any kind of lock.




technical sheet

Material	Stainless Steel
Opening Method	Fingerprint, Code, Card, WiFi, Bluetooth, APP, Mechanical Key
Identification Time	<1.0S
Communication	Bluetooth 4.1, Mifare [13,56MHz]
Cylinder	European Cylinder
Compatibility with Locks	European Standard from 70mm to 92mm
Emergency Power	Micro USB
Emergency Opening	Mechanical Key
Voltage	DC 6v [AAA*4]
Max. Power	6V-MAX
Battery Life	~12 months, supports ~5,000 opening and closing operations
Leds	White
Low Battery Alarm	In APP and voice alarm
Consumption	<200mA
Static Consumption	65µA
Time Open	5s; 10s; 15s; 30s; 60s; custom
Number of Openings	~5,000 openings [1year]
Software	iTEC Hybrid, iTEC onAccess [web], iTEC onAccess Pro [web], iTEC onHospitality [web]
APP's	iTEC onAccess
Compatibility	iOS 8/Android 5 or above
Stand Alone	No
IP	IP55
Weight	1,94 Kg
Humidity Resistance	30%-95%
Temp. of Operation	-20°C~+55°C
Nº of Cards	200
Nº of Codes	Unlimited
Nº of Autodefined Codes	150
Nº of Fingerprints	150
User Levels	Yes
Management Code	Yes
Door Thickness	35m~110mm

mortises

iC 60x72® iK 55x72® Euro Mec® iTSL 01®

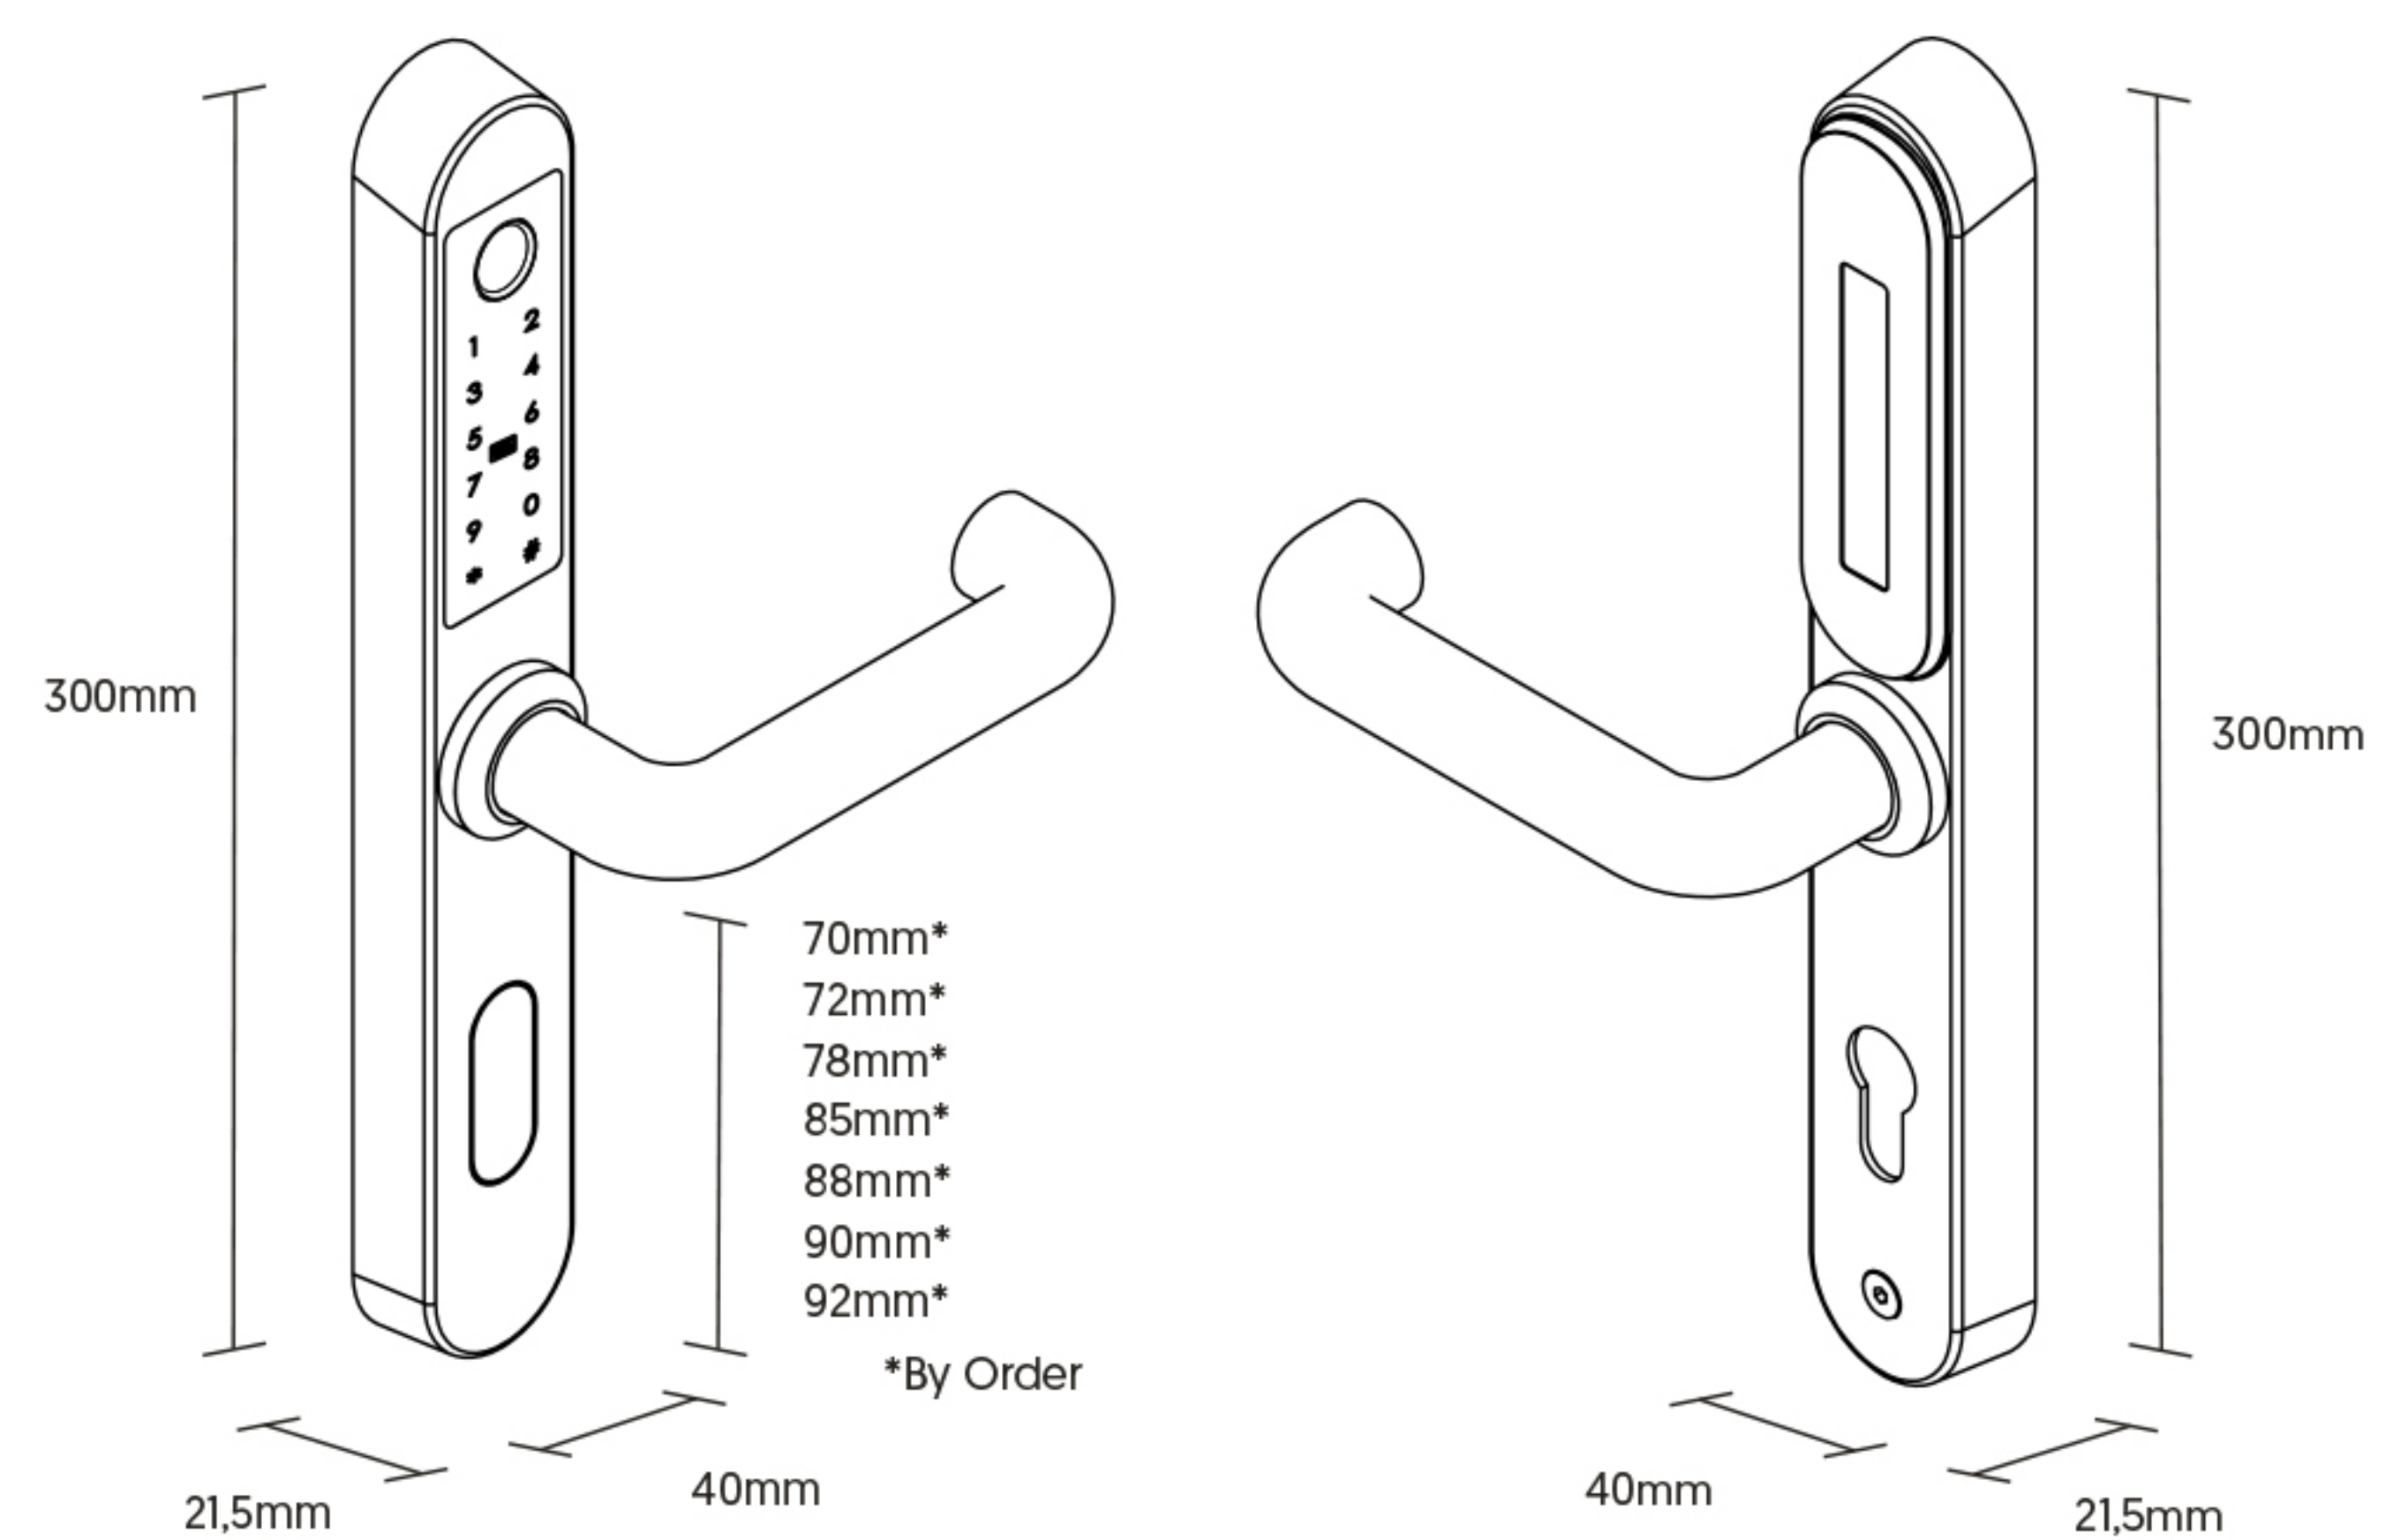



Web: GlobalVisionsInc.com
Email: sales@GlobalVisionsInc.com
Phone: 877-725-8869